

8-Channel Cable Connector

FPC-8-FB-280-01

DC~67GHz, SSMP Female

Features:
• Low VSWR

Applications:
• Wireless
• Radar
• Instruments
• Electronics

Electrical

Frequency	DC-67GHz
Impedance	50Ω
VSWR	1.25 typ. @DC~40GHz

Mechanical


Mating Cable	FPH280
Mating PCB Connector	FPC-8-MB-01
Conductor	Gold plated brass
Connector ^[1]	SSMP female

[1] Mateable with GPPO, SMPM & Mini-SMP

Environmental

Temperature	-55 ~ +155°C
-------------	--------------

Outline Drawings

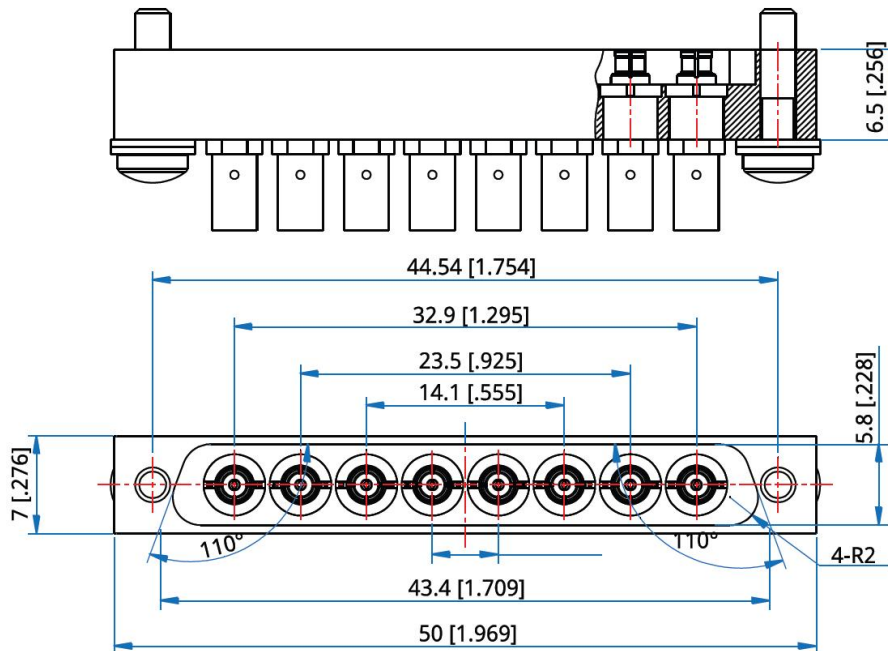

Unit: mm [in]
Tolerance: ±0.02mm [±0.008in]