

Coaxial Adapter

FPCA-SMSF-R-68

SMA(M) to SMA(F), Right Angle, IP68

Features:

- Low VSWR

Applications:

- Wireless
- Transmitter
- Laboratory Test
- Radar

Electrical

Frequency: DC~18GHz

VSWR: 1.35 max.

Impedance: 50 Ω

Mechanical

Coax Connectors: SMA(M) to SMA(F)

Body: Stainless Steel


Contact: Beryllium Copper

Insulator: PTFE

Environmental

Rating: IP68

Construction

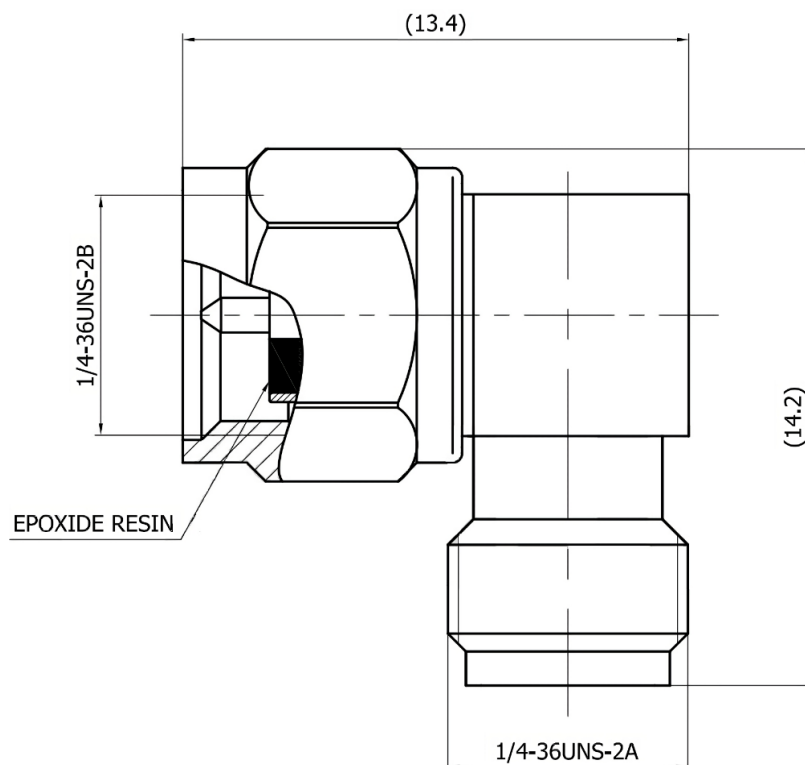

Note(s)

Unit: mm