

Fixed Attenuator


Model

P/N: FPFA-1825-18-3-S-S

Fixed Attenuator Specifications

ITEM	TECHNICAL SPECIFICATION		
Frequency Range	DC – 18 GHz		
Impedance	50 Ω		
Attenuation Value	3 dB		
Attenuation Accuracy	± 0.8 dB		
VSWR	1.45 Max.		
Power Handling	25 Watt (Average Power) Max.		
Peak Power	Peak Power (W)	Pulse Width (μ s)	Duty Cycle (%)
	500	5	2.5
	5000		1.25
	1000		1.25
Port Connector 1	SMA-Female (50 Ω)		
Port Connector 2	SMA-Female (50 Ω)		
Operating Temperature	-55°C to +125°C		
Dimensions (mm)	$\phi 44 \times 94$		

Dimensions (± 2 mm)

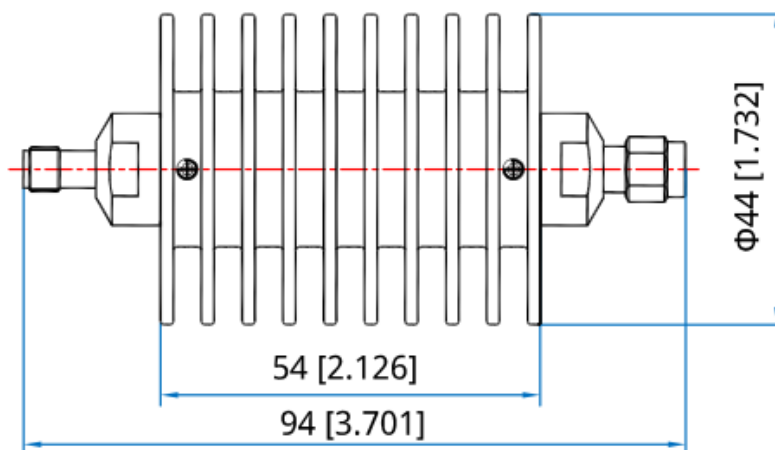

Note(s)

The specifications are subjected to 5% tolerance.
 Outline A = N Connectors; Outline B = SMA Connectors