

## Diplexer


### Model

P/N: FPDP-475-950-3200-3600-S

### Diplexer Specifications

ITEM	TECHNICAL SPECIFICATION
Passband Frequency Range	0.01 GHz – 0.95 GHz 1.4 GHz – 5.0 GHz
Passband Insertion Loss	1.0 dB Max. @ 0.01 – 0.95 GHz 1.0 dB Max. @ 1.4 – 5.0 GHz 0.6 dB Max. @ 0.475 GHz 1.0 dB Max. @ 3.2 GHz
Return Loss	14 dB Min.
Stopband Rejection	50 dB Min. @ 1.4 – 5.0 GHz 50 dB Min. @ 0.01 – 0.95 GHz
Power Handling	10W Max.
Port Connectors	SMA-Female (50 Ω)
Temperature	-40°C ~ +70°C
Dimensions (mm)	49 x 25 x 13.2

### Dimensions (±0.5 mm)

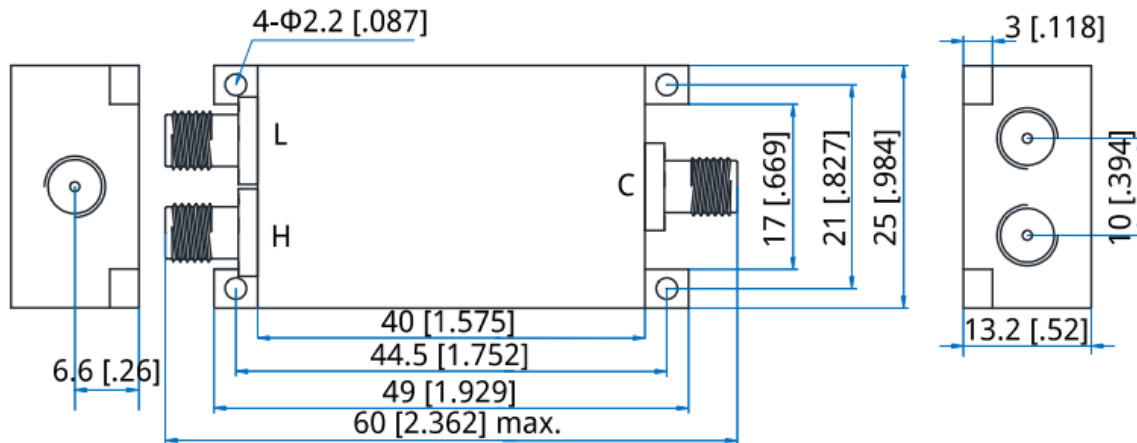

### Note(s)

The specifications are subjected to 5% tolerance.