

Fixed Attenuator


Model

P/N: FPFA-1810-8-30-SM-S

Fixed Attenuator Specifications

ITEM	TECHNICAL SPECIFICATION		
Frequency Range	DC – 8 GHz		
Impedance	50 Ω		
Attenuation Value	30 dB		
Attenuation Accuracy	± 0.8 dB		
VSWR	1.25 Max.		
Power Handling	10 Watt (Average Power) Max.		
Peak Power	Peak Power (W)	Pulse Width (μ s)	Duty Cycle (%)
	500	5	1
Port Connector 1	SMA-Male (50 Ω)		
Port Connector 2	SMA-Female (50 Ω)		
Operating Temperature	-55°C to +125°C		
Dimensions (mm)	$\phi 15.8 \times 47.5$		

Dimensions (± 2 mm)

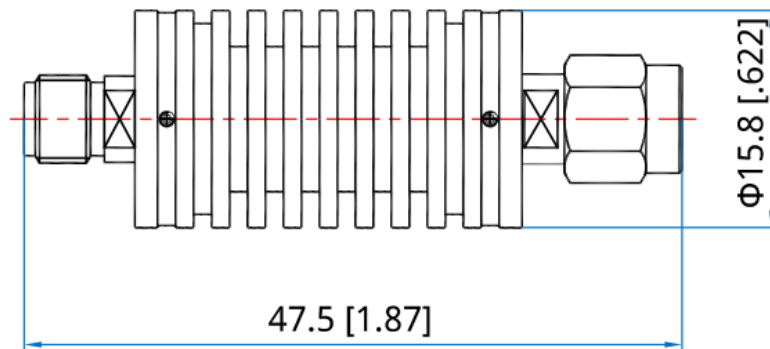

Note(s)

The specifications are subjected to 5% tolerance.
Outline A = N Connectors; Outline B = SMA Connectors