

Fixed Attenuator


Model

P/N: FPFA-2650-26.5-6-SM-S

Fixed Attenuator Specifications

ITEM	TECHNICAL SPECIFICATION		
Frequency Range	DC – 26.5 GHz		
Impedance	50 Ω		
Attenuation Value	6 dB		
Attenuation Accuracy	± 2.5 dB		
VSWR	1.3 Max.		
Power Handling	50 Watt (Average Power) Max.		
Peak Power	Peak Power (W)	Pulse Width (μ s)	Duty Cycle (%)
	500	5	5
Port Connector 1	SMA-Male (50 Ω)		
Port Connector 2	SMA-Female (50 Ω)		
Operating Temperature	-55°C to +85°C		
Dimensions (mm)	$\phi 44$ x 94		

Dimensions (± 2 mm)

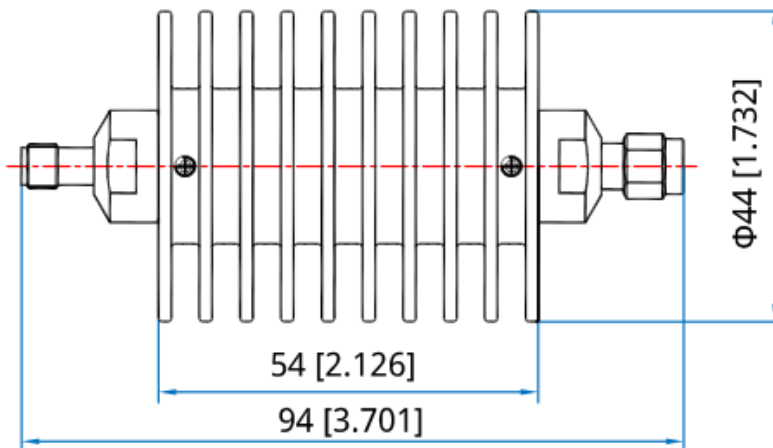

Note(s)

The specifications are subjected to 5% tolerance.
Outline A = N Connectors; Outline B = SMA Connectors